

EXHAUST POSITIONED AT THE DOWNSTREAM END OF A GLASS MELTING FURNACE

Publication number: WO02092521

Publication date: 2002-11-21

Inventor: BAKER DAVID J (US); ADAMS HARRY P (US);
LEBLANC JOHN R (US)

Applicant: OWENS CORNING FIBERGLASS CORP (US); BOC
GROUP INC (US); BAKER DAVID J (US); ADAMS
HARRY P (US); LEBLANC JOHN R (US)

Classification:

- **international:** C03B5/04; C03B5/235; C03B5/237; C03B5/00; (IPC1-
7): C03B5/04; C03B3/00; C03B5/237

- **European:** C03B5/04; C03B5/235; C03B5/237

Application number: WO2001US15967 20010516

Priority number(s): WO2001US15967 20010516

Also published as:

EP1390308 (A1)
MXPA03010395 (A)
EP1390308 (A0)
CN1516680 (A)
CA2448616 (A1)

more >>


Cited documents:

WO9610097
SU1836603
EP0359003
DE9206502U
US4481024
more >>

Report a data error here

Abstract of WO02092521

A glass-melting furnace (10) has an upstream end (6), a downstream end (8), and a roof (22). The upstream end is positioned upstream of the downstream end. A charger (32) is provided to supply glass-forming material (30) to the upstream end of the furnace. At least one burner (34) is provided to supply heat to the glass-forming material at the upstream end of the furnace. An exhaust (60) is in communication with the downstream end of the furnace, with the exhaust being positioned downstream of the at least one burner.

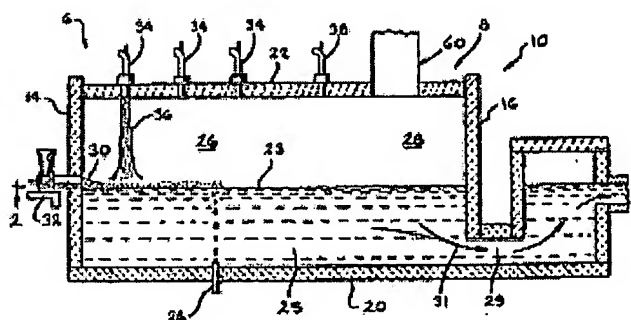

Data supplied from the esp@cenet database - Worldwide